

## DS-15HT

### Two-way Loudspeaker System


The DS-15HT is a compact, coaxial-driver, 2-way, highly weather-resistant full range loudspeaker with high SPL, the body is made of engineering plastic injection molding, equipped with or without multi-tap transformers, conforms to IP56 international standard.



### Features:

- Product parameters have been entered into EASE loudspeaker database
- Pass IP56 testing, meet all-weather use
- The cabinet is made of polymer compound injection molding
- Coaxial point sound source
- Horn-loaded design
- Applications: parks, plazas, stadiums, sound reinforcement of scenic areas, transportation hubs, seashores(customized)

### Overall dimensions

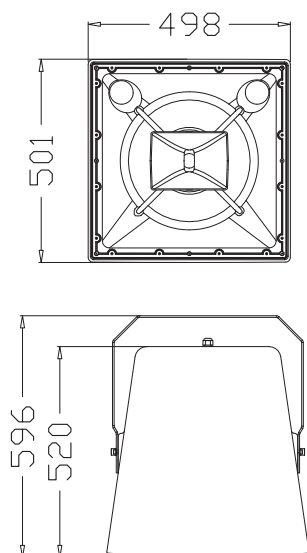

### Technical specifications

|                          |                                  |
|--------------------------|----------------------------------|
| FREQUENCY RESPONSE(-3dB) | 50Hz-18kHz                       |
| DRIVERS                  | 1×15 " (385mm)/3 " voice coil LF |
|                          | 1×1.4 " (36mm) /3" voice coil HF |
| INPUT VOLTAGE            | 100V                             |
| POWER                    | 75W/150W/300W/OFF/8Ω 400W        |
| SENSITIVITY              | 103 dB 1 watt/1 metre            |
| MAXIMUM SPL              | 129 dB continuous, 135dB peak    |
| IMPEDANCE                | 8 ohms nominal                   |
| DISPERSION(-6 dB)        | 60 ° ×40 °                       |
| CROSSOVER                | 1.5 kHz passive                  |
| DIMENSIONS               | (W)498mm×(H)501mm×(D)596mm       |
| WEIGHT                   | 31kg/pc                          |

